

Maximulch

Serie 3

Soil preparing tools
Blade / Disc combinations



The Professional's Choice



Exclusive technology

Complete soil preparation in one passage


Work up to 30 cm deep From 6 to 12 km/h

Maximulch mounted Serie 3

Maximulch Semi-mounted Serie 3

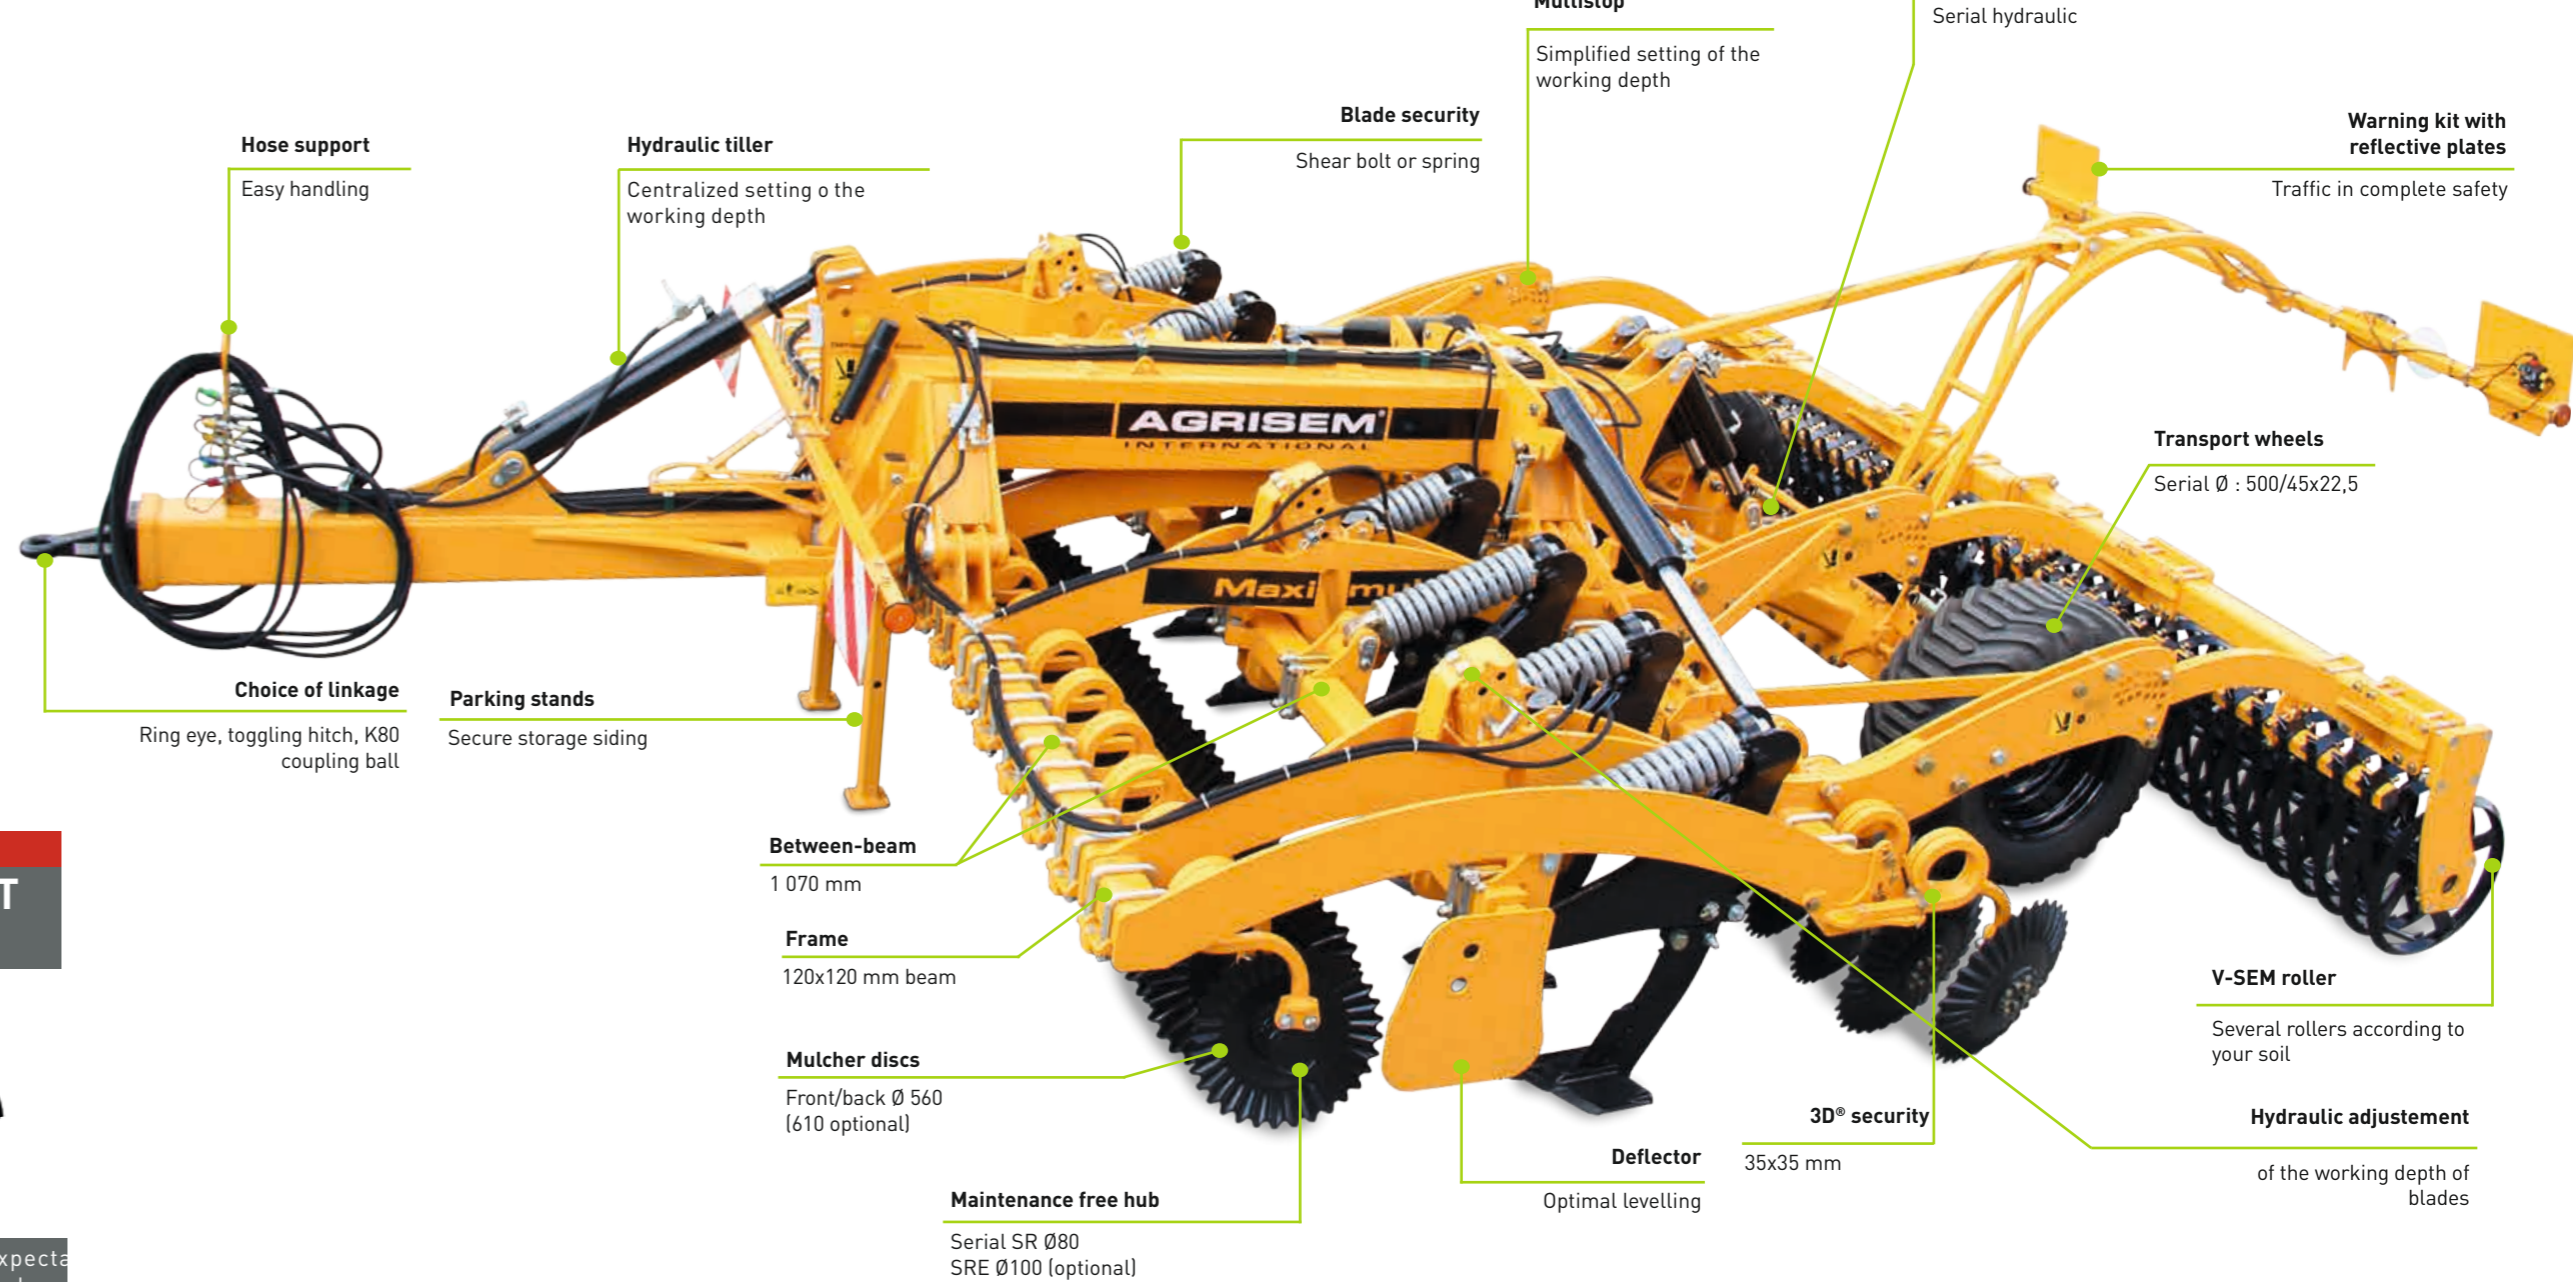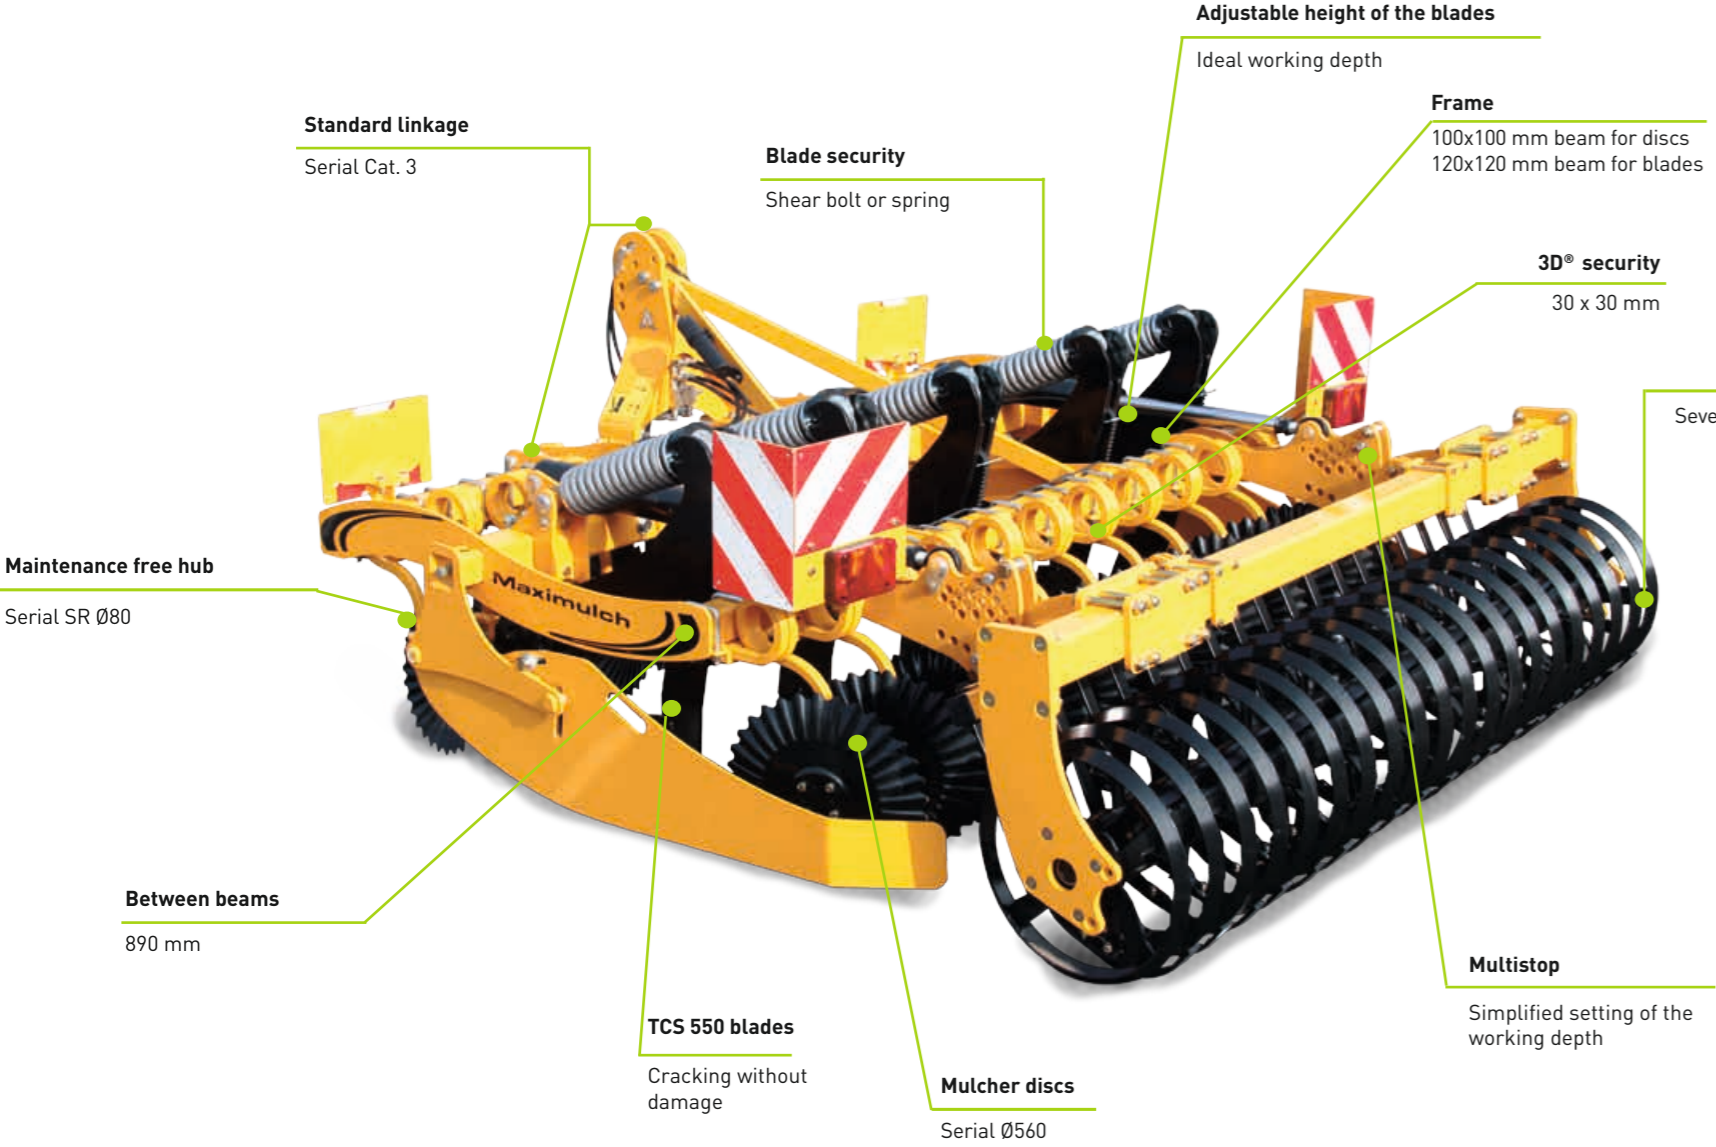

NEW CARBI-PROTECT ploughshares

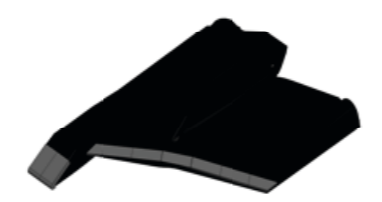

- 5 to 10 times more life expectancy
- Regular quality of the work
- Easy to replace

Rack system



- Allows to adapt the working depth of the blades depending on soil type
- Rapid setting

3D security with percussion effect



- Quality of work
- Energy saving
- No maintenance

Maintenance free hub



- Maintenance free
- Dustproof hubs = reliability
- Possibility of working at high speed

Roller folding system



- Hydraulic roller folding system
- Balance of the weight transport

New MULCHER disc




- Maximum mincing of crop
- Self-cleaning in wet conditions
- Unchanged working quality with the wear of the disc

Agronomic cracking



- No disruption of the horizons
- Verticale cracking by the creation of a wave
- Facilitates crop growing and capillary rise

Economy

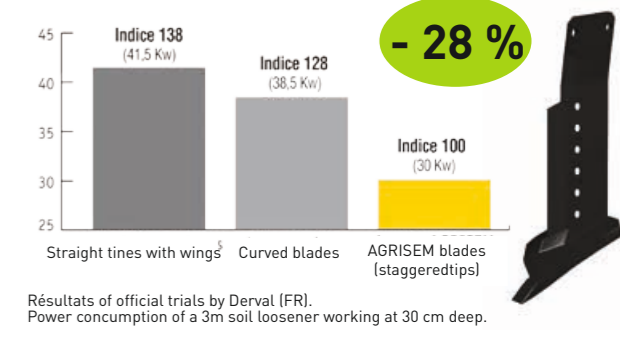

- Nearly 30% less power than a traditional soil loosener
- Improved productions

Specifications

Maximulch Semi-mounted Serie 3



DS 200/500



Approved machine

SEMI-MOUNTED

	Folding models		Folding models	
	4,50 m	6,00 m	6,00 m	6,00 m
Working width	4,50 m		6,00 m	
Weight (kg) with roller cage	7 770	7 860	9 420	9 510
Power (hp)	180 - 240	180 - 240	250 - 350	250 - 350
Number of discs	36+1	36 + 1	48+1	48 + 1
Number of blades	6	8	8	10

ROLLERS



Maximulch mounted Serie 3



DS 200/500

MOUNTED

	Rigid models		
Working width (m)	3,00	3,50	4,00
Transport width (= m) (without accessories)	3,00	3,50	4,00
Power req. mini / maxi (hp)	120 - 160	145 - 195	170 - 220
Weight with Shear-Bolt security and Cage roller Ø526 (= kg)	2 152	2 435	2 738
Weight with Non-Stop security and Cage roller Ø526 (= kg)	2 542	2 903	3 284
Number of discs	21	25	29
Number of TCS blades	5	6	7

ROLLERS



535 rue Pierre Levasseur T. +33 (0)2 51 14 14 40 agrisem@agrisem.com
 44158 ANCENIS - FRANCE F. +33 (0)2 40 96 32 36 www.agrisem.com



Documentation, photos and non contractual technical data can be modified without prior notice. Printed in February 2015. Do not litter.

Your dealer
